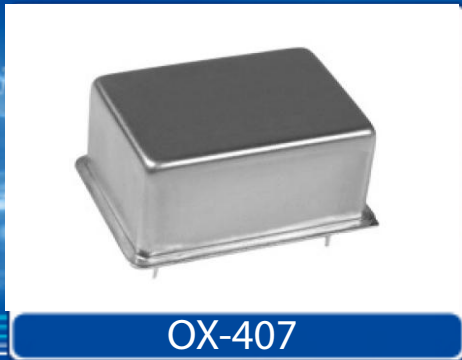


Helping Customers Innovate, Improve &amp; Grow


**OX-407**

The OX-407 is a low g-sensitivity ovenized crystal oscillator in a compact dual inline package (DIP) enclosure. Designed for applications that require excellent dynamic phase noise from 10Hz to 2kHz. The OX-407 offers g-sensitivity as low as 0.07 ppb/g, and a static noise floor below -150 dBc/Hz at 100 kHz offsets, with a temperature stability of 100 ppb.

### Features

- g-sensitivity as low as 0.07 ppb/g
- -150 dBc/Hz at 100kHz offset
- Standard frequencies - 10, 12.5, 20, 25, 40 and 50 MHz
- Dip package (14x 20 mm)
- Temperature Stability 100 ppb -40 to 70°C

### Applications

- Military Radar
- Instrumentation and Test Equipment
- Missile Systems
- Signal Intelligence


### Performance Specifications

Parameter	Min	Typ	Max	Units	Condition
<b>Frequency Stabilities<sup>1</sup></b>					
vs. operating temperature range (from nominal frequency)	-0.1		+0.1	ppm	-40 to 70°C
vs. supply voltage change	-0.05		+0.05	ppm	at time of shipment, nominal EFC Vs ± 5%
vs. aging / 1 year			±0.5	ppm	
<b>Supply Voltage (Vs)</b>					
Supply voltage	4.75	5.0	5.25	VDC	
	3.15	3.3	3.45	VDC	
Power at Warm Up			3	W	all temperatures
Power steady state			1W		at 25 C

## Performance Specifications

Parameter	Min	Typ	Max	Units	Condition
<b>RF Output</b>					
Signal	HCMOS				
Load		15		pF	
Signal Level (Vol)			0.1*Vs	V	
Signal Level (Voh)	0.9*Vs			V	
Rise/Fall Time			5	ns	@ nominal Load and 10% to 90% of waveform
Duty cycle	40	50	60	%	@ nominal Load and @ 50% level
Signal	Sinewave				
Output Power	0			dBm	50 ohms
Harmonics			-20	dBc	50 ohms
<b>Electronic Frequency Control (EFC)</b>					
Tuning Range (options A, C)	Fixed; No adjust				
Tuning Range (options B, D)	±5.0		±12	ppm	
Tuning Slope	Positive				
Control Voltage Range	0.0		Vs	VDC	
Freq. control input impedance	10			kohm	
<b>Additional Parameters<sup>1</sup></b>					
Phase Noise (@ 40 MHz - no vibration)		-84 -114 -134 -145 -150		dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz	10 Hz 100 Hz 1 kHz 10 kHz 100 kHz
g-sensitivity		0.2		ppb/g	per axis (ordering code A and B)
			0.07	ppb/g	per axis (ordering code C and D) parts 100% tested with 100 Hz sine vibration
Shock					MIL-STD-883G; Method 2002.4; Condition D
Vibration Sine					MIL-STD-202G, METHOD 204D, Test Condition D
Thermal Cycling					MIL-STD-202, METHOD 107, Test Condition A
<b>Absolute Maximum Ratings</b>					
Supply voltage (Vs)			6.0	V	Damage will occur beyond this level
Control Voltage	0		Vs	V	
Operable temperature range	-45		+90	°C	
Storage temperature range	-55		+105	°C	


# Outline Drawing

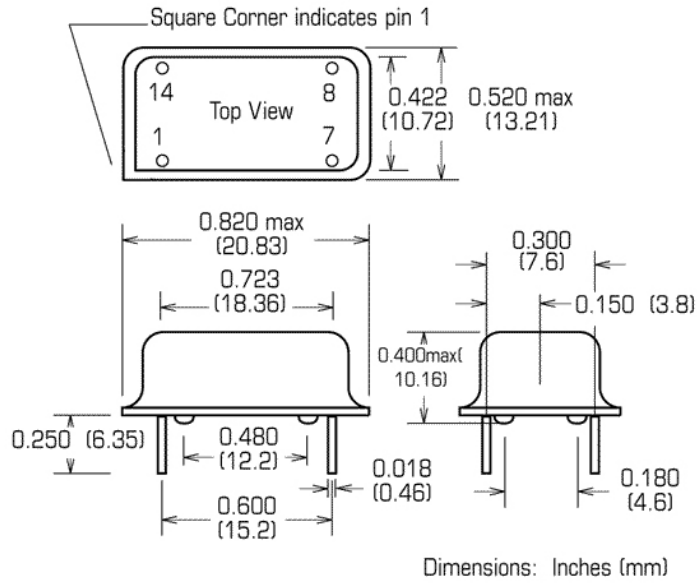

Code	Height "H"	Pin Length "L" Min
0	11.0	5.0
Pin Connections		
1	Electronic Frequency Control (EFC)	
7	Ground (case)	
8	Output	
14	Supply Voltage (Vs)	

[Dimensions in mm]

## Ordering Information

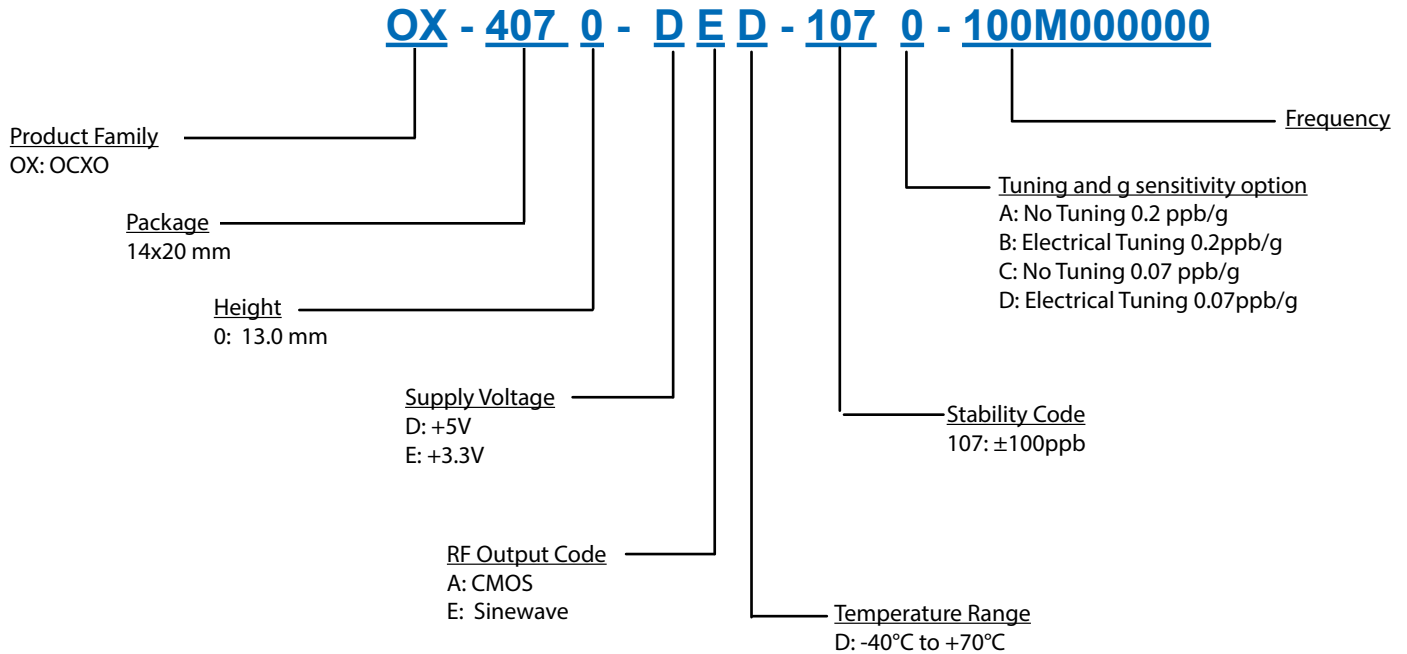

### Notes:

1. Unless otherwise stated, all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, and temperature (25°C).

## Contact Information

### USA:

100 Watts Street  
Mt Holly Springs, PA 17065  
Tel: 1.717.486.3411  
Fax: 1.717.486.5920

### Europe:

Landstrasse  
74924 Neckarbischofsheim  
Germany  
Tel: +49 (0) 7268.801.0  
Fax: +49 (0) 7268.801.281



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly, or otherwise, under any Microchip intellectual property rights unless otherwise stated.

### Trademarks

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.